

# Add Powerdevices and Buttons to your Raspberry

To keep the price down, the Raspberry Pi board doesn't ship with a power button, yet it's easy to add your own! This guide will show you how to add a power button to your Raspberry Pi that can turn on/off your BATOCERA system.

If you don't want to build your own, several popular commercial options are available. They will add a power switch to your Raspberry Pi, sometimes provide a temperature-controller fan... and add a stylish look to your board.

- Commercial Power Switches
  - Provide real power cuts
  - Costs are around 10-25 USD
  - Usually need some space to build it in
- Simple Buttons or latching switches
  - Very simple setup
  - Low cost
  - No powercut possible

## Why is a Raspberry Pi power button important?

You should never “yank” the power cord out of your Pi as this can lead to severe data corruption (and in some cases, physically damage your SD card). Even if Batocera is best prepared against file corruption it is recommended to safely shut down your Pi via Batocera's **Shutdown** Menu or even better, use a power button or switch.



When Batocera “shuts down” the Pi with a simple button/latching switch, it will send it into a halt state, which still consumes a very small amount of power. This is similar to how all modern computers work. In this guide we will only go into a halt state so that we can still power it up again later without having to replug the power source. You can safely disconnect the power supply (should you desire) without the worry of data corruption while in the halt state.

This method gives the best user experience if you use the GPi-case from Retroflag for example. This nice housing only has one button switch to simply turn on/off the Raspberry. Since Batocera 5.25 the OS is best prepared for all kinds of power devices connected to the Raspberry. But you will lose your game SRM save (your in-game save file) if you just trigger the power button *inside* a game session.

## Save data protection

1. Download the provided script below

2. Save this to /userdata/system
3. Set executable bit with `chmod +x /userdata/system/custom.sh`
4. Setup your power device according to further below

### custom.sh

```
#!/bin/bash
# custom.sh - place to /userdata/system
# by cyperghost 23/11/19
#
if [[ $1 == stop ]]; then
    batocera-es-swissknife --emukill
fi
```

## Commercial Power Switches

Here are some commercial power switches/commercial cases with power switches that are currently supported. These offer a real power cut, that means the Raspberry is really switched off. Usually these small power devices are plugged on top of the Raspberry using it's 40 Pin header. For further install instruction use the links provided.

Here are the values you can put as `system.power.switch=<value_below>` in `batocera.conf`:

Device Name	system.power.switch	Where to buy and additional manufacturer information	Notes related to Batocera
Argon One for RPi4	ARGONONE	<a href="https://www.argon40.com/argon-one-raspberry-pi-4-case.html">https://www.argon40.com/argon-one-raspberry-pi-4-case.html</a>	<a href="#">Get more details here</a>
ATXRaspi	ATX_RASPI_R2_6	<a href="http://lowpowerlab.com/atxraspi/#installation">http://lowpowerlab.com/atxraspi/#installation</a>	
DeskPi Pro case	DESKPIPRO	<a href="https://deskpi.com/collections/frontpage/products/deskpi-pro-for-raspberry-pi-4">https://deskpi.com/collections/frontpage/products/deskpi-pro-for-raspberry-pi-4</a>	
Mausberry Circuits	MAUSBERRY	<a href="http://mausberry-circuits.myshopify.com/pages/setup">http://mausberry-circuits.myshopify.com/pages/setup</a>	
msldigital PiBoard r2013	REMOTEPiBOARD_2003	<a href="http://www.msldigital.com/pages/support-for-remotepi-board-2013">http://www.msldigital.com/pages/support-for-remotepi-board-2013</a>	
msldigital PiBoard r2015	REMOTEPiBOARD_2005	<a href="http://www.msldigital.com/pages/support-for-remotepi-board-plus-2015">http://www.msldigital.com/pages/support-for-remotepi-board-plus-2015</a>	
OneNineDesign Powerhat	POWERHAT	<a href="https://github.com/redoakcanyon/HATPowerBoard">https://github.com/redoakcanyon/HATPowerBoard</a>	
Pimoroni OnOffShim	ONOFFSHIM	<a href="https://shop.pimoroni.com/products/onoff-shim">https://shop.pimoroni.com/products/onoff-shim</a>	
UUGear Witty Pi	WITTYPi	<a href="http://www.uugar.com/witty-pi-realtime-clock-power-management-for-raspberry-pi">http://www.uugar.com/witty-pi-realtime-clock-power-management-for-raspberry-pi</a>	Script uses WiringPi.
Retroflag cases	RETROFLAG	<a href="http://www.retroflag.com">http://www.retroflag.com</a>	<b>NEW</b> NESPi4 support! <a href="#">Get more details here.</a>


Device Name	system.power.switch	Where to buy and additional manufacturer information	Notes related to Batocera
Retroflag cases with buttons	RETROFLAG_ADV	<a href="http://www.retroflag.com">http://www.retroflag.com</a>	Same as the previous one, except the button can trigger actions, like stopping emulators
Retroflag GPIO case	RETROFLAG_GPI	<a href="https://www.retroflag.com/GPI-CASE.html">https://www.retroflag.com/GPI-CASE.html</a>	<a href="#">Get more details here.</a>
Kintaro Super Kuma/Roshambo Retro Gaming case	KINTARO	<a href="https://www.amazon.com/dp/B079T7RDLX/?tag=electromake-20/">https://www.amazon.com/dp/B079T7RDLX/?tag=electromake-20/</a> / <a href="https://www.electromaker.io/blog/article/roshambo-retro-gaming-case-review">https://www.electromaker.io/blog/article/roshambo-retro-gaming-case-review</a>	

## Simple push-button or switches

It is possible to add a button to turn on and turn off your Batocera console properly! But how?

### Which GPIO PIN should I use?

You can add a power button to switch on/off Batocera. The button can be either a push button (momentary button) or a switch button (latching switch). Note on the push buttons: some GPIO have resistors pull-up built-in (resistors connected to the + 3.3V), so it is preferable to use switches normally open (abbreviated NO) with these pins.

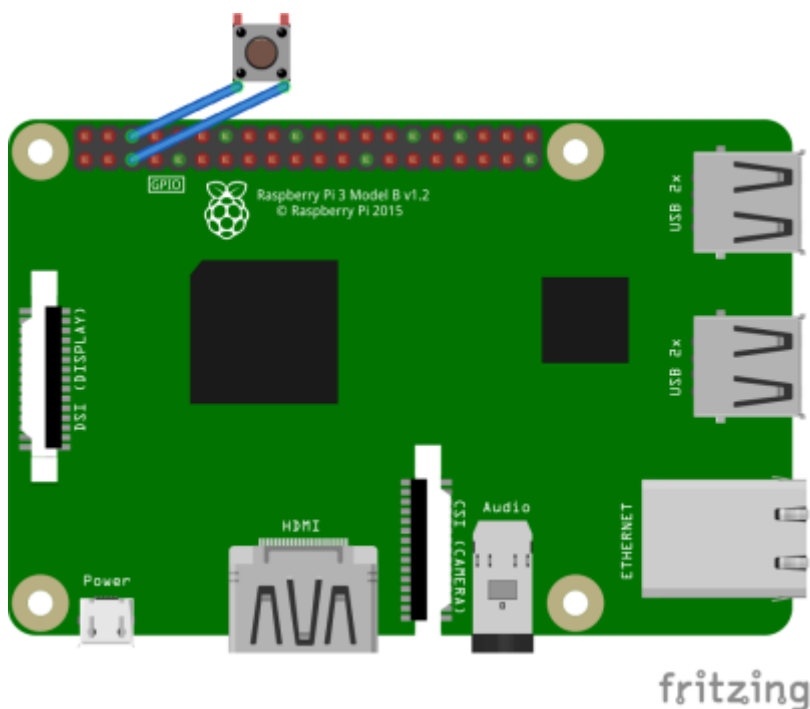


to connect the switch to the Raspberry Pi GPIO, plug a PIN on the GPIO3 (physical PIN 5 above on the left) and another on the mass located just to the right on the right (physical PIN 6)

## Activation of the switch

### GUI Menu Mode

Get a terminal window by quitting EmulationStation with a Keyboard or get a [access to terminal by SSH](#). Now enter `/etc/init.d/S92switch setup` and you will see a terminal window like in picture below. From there you can select and activate your power or switch device. The script will show you an already activated device (**ONOFFSHIM** in this case) and will latter show you a small message box, if the value setup was successfully set up. After this reboot the device and everything should work fine.

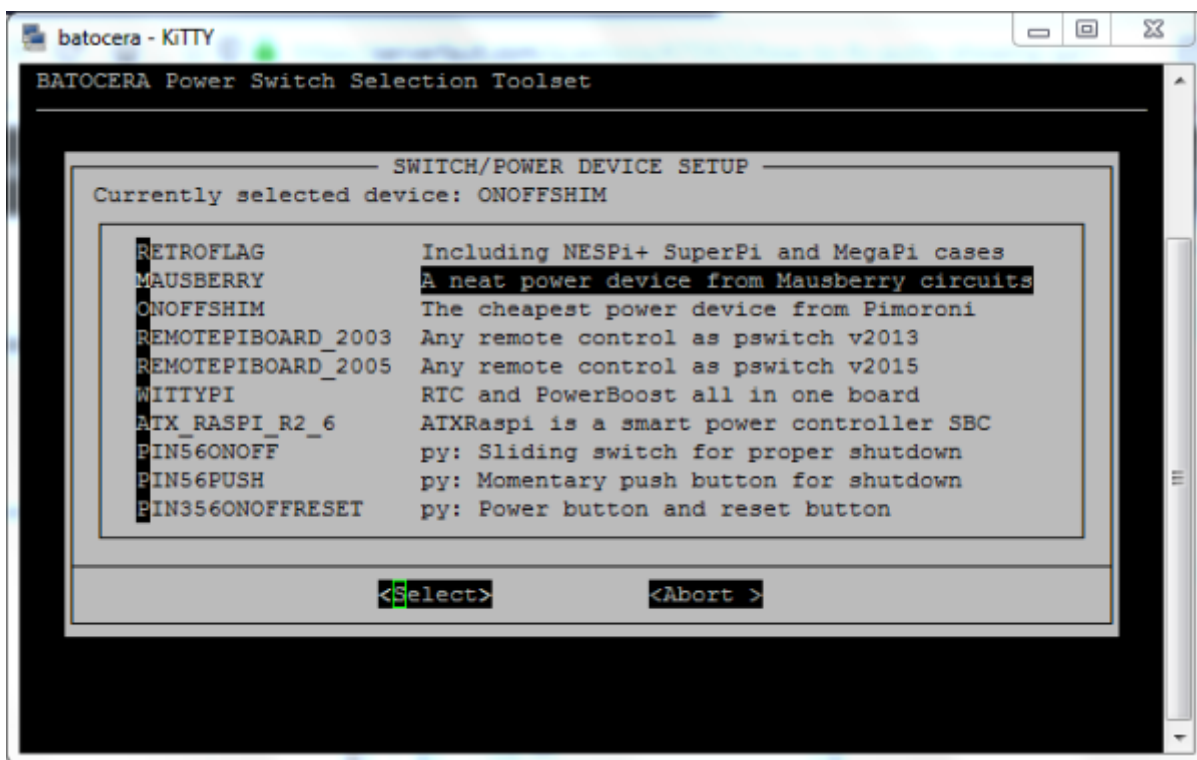

### Manual activation

Check in the table above what is the type of power switch you need.

Then, edit the config file `/userdata/system/batocera.conf` - in the example below with `PIN56ONOFF`.

- For a latching switch edit `batocera.conf` with your preferred text editor and add `system.power.switch=PIN56ONOFF`
- Reboot the system
- Alternatively, if you don't want to edit the file and you are logged in with SSH or you have a terminal open then enter:

```
batocera-settings-set system.power.switch PIN560NOFF
```

then reboot. Your Batocera system can now be turned on/off with a button!

## Retroflag

Retroflag is the manufacturer who takes focus on retro case for Raspberry Pi series and for origin looking retro game controllers. In the last years they've managed to bring some pretty nice looking housings to the market. These are inspired of gaming devices from the golden era of game consoles. If you are a proud owner of [a GPicase](#), then take a look here. Besides the nice looking there are **always** working buttons for power and/or reset possible. But you have to take a few steps there.

1. Enable the **Safe Shutdown Switch on the PCB!** This small switch depends on the used housing, refer to the shipped manual from Retroflag how to do this.
2. Edit `batocera.conf` and set the correct switch mode.
  - You can edit the config file from SAMBA share with your dedicated text editor
  - or use SSH and you can edit the config file with nano  
`/userdata/system/batocera.conf`
  - or [use the GUI mode](#), you need SSH for this method, too.
3. Activate or Select the correct powerswitch `system.power.switch=RETROFLAG`
4. Reboot, this will activate the Safe Shutdown feature



### For the NESPi 4 case only

You have to do an additional reboot! Sorry guys, but we need to make an autoconfig behind the scenes!

Also, for the NESPi4 case, you might experience some sluggishness using the HDD/SSD “cartridge”. Here is [a Reddit link](#) that gives you a way to fix it (even if the reddit post was written for RetroPie, it has been reported as OK on Batocera too).

## Argon One

Activate the Argon One fan by adding `system.power.switch=ARGONONE` in the configuration file `batocera.conf`.

By default, the fan starts at 55 degrees Celsius. You can define own temperature/fan speed ladder by editing the file `/userdata/system/configs/argonone.conf` (it can be also edited from the network, via the SHARE SMB folder). On a freshly installed Batocera, this file doesn't exist, and the default temperature ladder is used. You need to create this file if you want to define your own temperature ladder.

```
# Configuration file for Argon One Pi4 case
# temperatures are in Celsius
# fan_speed are from 0-100 percent
# syntax is: temp_threshold=fan_speed
```

```
# default is:  
45=0  
55=10  
60=55  
65=100
```

With this ladder, fan starts at 10% when reaching 55 degrees, and rises up to 100% when reaching 65 degrees Celsius. From the vendor recommendations, it is safe to start the fan at 55 degrees only. Less noisy. ;)

From:

<https://wiki.batocera.org/> - **Batocera.linux** - Wiki

Permanent link:

[https://wiki.batocera.org/add\\_powerdevices\\_rpi\\_only?rev=1633658819](https://wiki.batocera.org/add_powerdevices_rpi_only?rev=1633658819)

Last update: **2021/10/08 02:06**

