

ZX81

The ZX81 is a computer developed by Sinclair. It was released in 1981, retailing for \$99.95 USD (\$302 in 2021).

ZX 81

The ZX81 was designed as the low-cost successor to the ZX80, accessible to the general public. It was a huge success.

This system scrapes metadata for the “zx81” group and loads the zx81 set from the currently selected theme, if available.



Quick reference

- **Emulator:** [RetroArch](#)
- **Core:** [libretro: 81](#)
- **Folder:** /userdata/roms/zx81
- **Accepted ROM formats:** .tZX, .p, .zip, .7z

BIOS

No ZX81 emulator in Batocera needs a BIOS file to run.

ROMs

Place your ZX81 ROMs in /userdata/roms/zx81.


To enable gamepad support, open RetroArch's **Quick Menu** with [HOTKEY] + , then **Settings** → **Input** → **Input User 1 Binds** and change **User 1 Device type: Retropad** to “Cursor Joystick”.

Emulators

RetroArch

[RetroArch](#) (formerly SSNES), is a ubiquitous frontend that can run multiple “cores”, which are essentially the emulators themselves. The most common cores use the [libretro](#) API, so that's why cores run in RetroArch in Batocera are referred to as “libretro: (core name)”. RetroArch aims to unify the feature set of all libretro cores and offer a universal, familiar interface independent of platform.

RetroArch configuration

RetroArch offers a **Quick Menu** accessed by pressing [HOTKEY] +  which can be used to alter various things like [RetroArch and core options](#), and [controller mapping](#). Most RetroArch related settings can be altered from Batocera's EmulationStation.

Standardized features available to all libretro cores: `zx81.videomode`, `zx81.ratio`, `zx81.smooth`, `zx81.shaders`, `zx81.pixel_perfect`, `zx81.decoration`, `zx81.game_translation`

ES setting name batocera.conf_key	Description ⇒ ES option key_value
Settings that apply to all cores of this emulator	
GRAPHICS BACKEND <code>zx81.gfxbackend</code>	Choose your graphics rendering ⇒ OpenGL <code>opengl</code> , Vulkan <code>vulkan</code> .
AUDIO LATENCY <code>zx81.audio_latency</code>	Audio latency in milliseconds, turn it up if you hear crackles ⇒ 256 256, 192 192, 128 128, 64 64, 32 32, 16 16, 8 8.
THREADED VIDEO <code>zx81.video_threaded</code>	Improves performance at the cost of latency and more video stuttering. Use only if full speed cannot be obtained otherwise. ⇒ On <code>true</code> , Off <code>false</code> .

libretro: 81

The ZX81 emulator, also capable of emulating ZX80, ZX Spectrum, Sinclair Spectrum, Jupiter ACE, Timex TS1000, TS1500, TS2068, TC2048, Lambda 8300, Ringo R470 and MicroDigital TK85.

libretro: 81 configuration


ES setting name batocera.conf_key	Description ⇒ ES option key_value
Settings that apply to all systems this core supports	
COLORIZATION <code>global.81_chroma_81</code>	Enable the Chroma 81 interface ⇒ Autodetect <code>automatic</code> , Off <code>disabled</code> , On (forced) <code>enabled</code> .
HIGH RESOLUTION <code>global.81_highres</code>	Enables WRX high resolution module ⇒ Autodetect <code>automatic</code> , Off <code>none</code> , On (forced) <code>WRX</code> .

Colorization

This checks if the Chroma 81 expansion is installed, and if so, loads a program prior to the loading of the program. This allows for color to be added to the program, which will remain otherwise blissfully unaware that it's running with colors.

Controls

Here are the default ZX81's controls shown on a [Batocera Retropad](#):

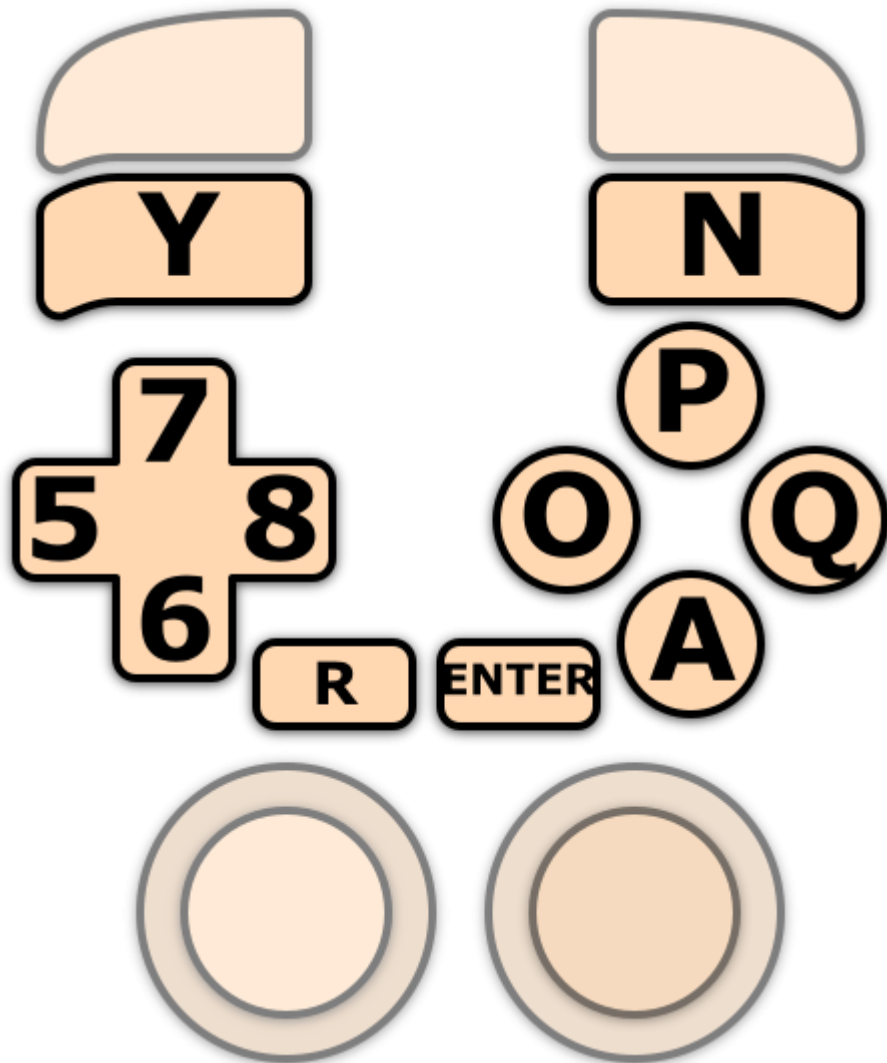

Troubleshooting

Further troubleshooting

For further troubleshooting, refer to the [generic support pages](#).

From: <https://wiki.batocera.org/> - **Batocera.linux** - Wiki

Permanent link: <https://wiki.batocera.org/systems:zx81?rev=1638923546>

Last update: **2021/12/08 00:32**

